

SRS Operating Manual

1. Model SL101 Hardware Specifications



Student Response Keypad Specs

Dimensions	95mm×55mm×5.8mm
Material	ABS+PC
Response function	0-9, A-F, Y/N input
Display	ID, Signal Intensity, Battery, Operation Instructions
RFID Module	2.4GHz
Battery	3×C2025 , total volume 450mAh service up to 12 months or more than 60,000 times of answering.
Communication Distance	30+ meters



Wireless Receiver Specs

Dimension	125mm×148.5mm×30.8mm
Material	ABS
Data Interface	USB Type B
Power	USB Power Supply
Antenna	External dual omnidirectional antenna
Indicator Light	Red and green indicator lights
Working Voltage	5V
Working Current	≤200mA
RFID Module	2.4GHz
Range	30+ meters




Teacher-end Controller Specs


Dimensions	114mm×46mm×23mm
Material	ABS+PC
Response function	Page up/down, A-D, OK
Display	ID, Signal Intensity, Battery, Operation Instructions
RFID Module	2.4GHz
Battery	2×AAA
Communication Distance	30+ meters

2. **Connecting.** Connect the receiver to your computer via the customized USB cable. It goes into standby status after a beep and the receiver's LED indicator light should be in red.

3. **Run Microsoft Office PowerPoint and get into SRS module to manage devices and preset the interaction details of each slide.**

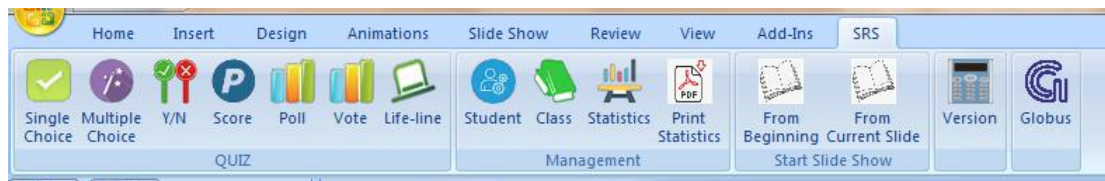

4. Student Management

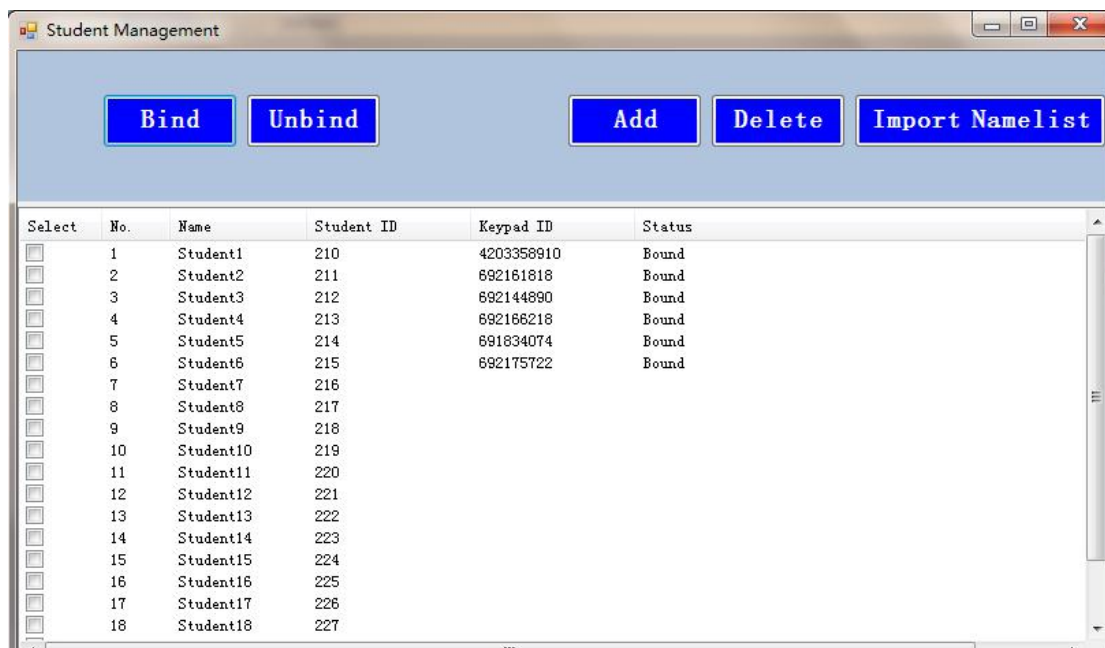

Binding guidance:

- Import Namelist (Edit from template)
- Select the students to bind keypads (right mouse click for select all)
- Double click Fn for pairing and binding. (Bind one by one in the list order. It is strongly suggested to be done by the teacher in case of

confusion. No need to re-pair once bound.)

5. Class Management



- Click Add to set up Class and Course.
- Make sure the **class name** is exactly same as the column in the imported student namelist.

Index	Name	Class	Student ID
1	Student1	Class1	210
2	Student2	Class1	211
3	Student3	Class1	212
4	Student4	Class1	213
5	Student5	Class1	214
6	Student6	Class1	215
7	Student7	Class1	216
8	Student8	Class1	217
9	Student9	Class1	218

6. Student Keypads

- It will display student name and class information on the screen.
- It will display operating instructions for questions.
- Double click Fn for pairing at first use.


7. Teacher-end Controller

- Click arrows to page up/down PPT
- Click OK to “start” and “end” answering
- Swipe on the receiver anytime to bind with system
- In Life-line section, the correct answer is displayed on the screen.

And,

- ✓ 50:50. Press A to get rid of two wrong answers randomly.
- ✓ Audience Poll. Press C to get poll and press OK to complete polling.
- ✓ Press B congratulate for correctly answered.
- ✓ Press D to say “Sorry” when incorrectly answered.


8. Software Presetting

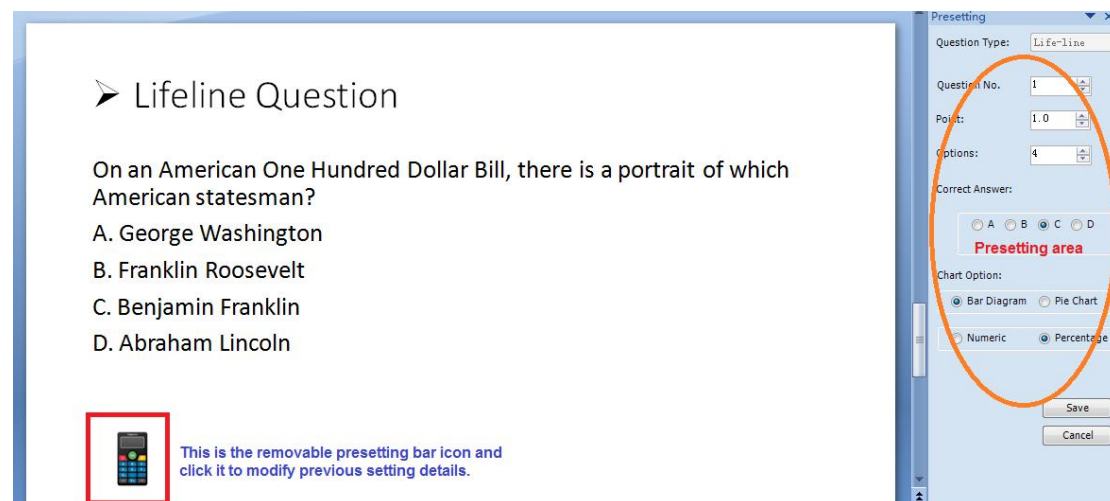

The screenshot displays the software interface for a Lifeline Question. On the left, the question text reads: "On an American One Hundred Dollar Bill, there is a portrait of which American statesman?" with four options: A. George Washington, B. Franklin Roosevelt, C. Benjamin Franklin, and D. Abraham Lincoln. A red box highlights a small icon of a handheld device at the bottom left, with a caption: "This is the removable presetting bar icon and click it to modify previous setting details." On the right, the "Presetting" panel is visible, containing fields for "Question Type" (Life-line), "Question No." (1), "Point:" (1.0), and "Options:" (4). Below these fields, the "Correct Answer:" section has radio buttons for A, B, C, and D, with C selected. A red circle highlights this "Correct Answer:" section, which is labeled "Presetting area" in red text. Below the radio buttons, there are "Chart Option:" settings for "Bar Diagram" and "Pie Chart", and "Numeric" and "Percentage" options, with "Percentage" selected. "Save" and "Cancel" buttons are at the bottom of the panel.

9. Rank

Each section of Quiz can rank the respondents by points and time spent.

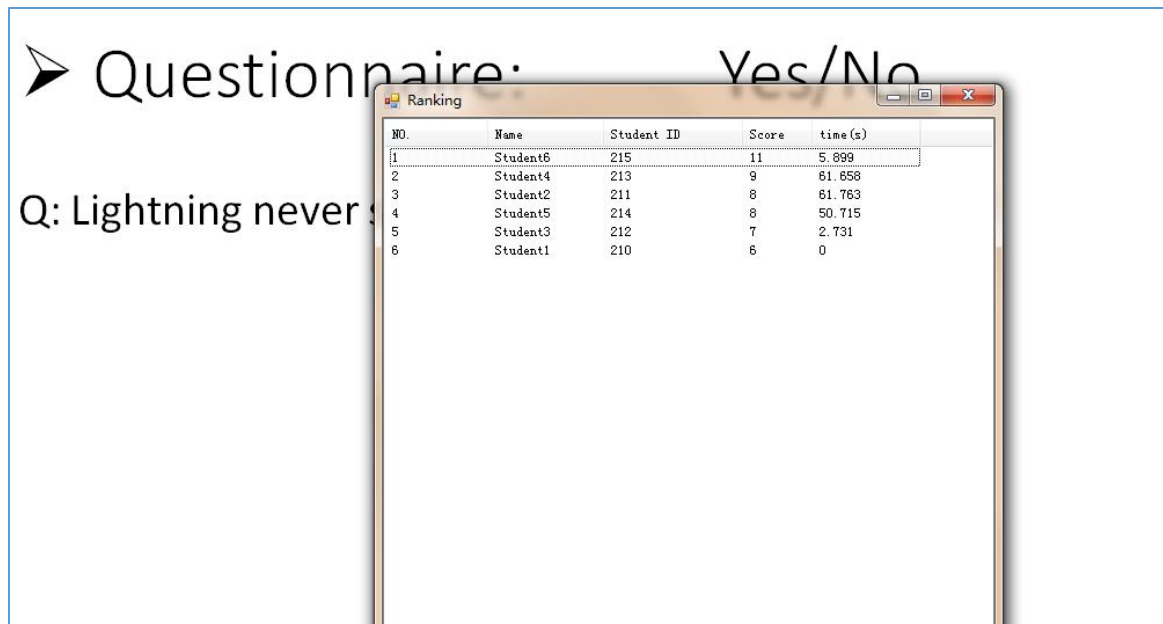

10. Barrage

The student name will slowly across the screen once he/she submits answer under barrage on status.

Notice

- ✧ The system for Microsoft Win7, Win10 and all versions of MS Office.
- ✧ Please install the USB drive program from the file package if the receiver can not work on your PC.
- ✧ The response distance might be influenced by the site environment.
- ✧ The system adopts bi-directional communication technology, so the number of users is limited to 120.
- ✧ Please contact the technical team via support@mysoonlink.com.